# AQUAVENT 6000

6000C / 6000SC



# THE HIGH-PERFORMANCE CIRCULATION PUMP SOLUTION

High efficiency, compact construction and reliability are the core requirements for modern circulation pumps.

The Spheros Aquavent range combines proven cutting-edge technology in a compact format and in modern lightweight construction. Last but not least, the optimized mounting possibilities are extremely application-friendly.



### **HIGHLIGHTS**



#### Low life-cycle costs

#### Aquavent 5000 / 5000S

- Extended working lifetime through improved motor efficiency
- · No maintenance

#### Aquavent 5000S

- Magnetic coupling (seal-free; basic Aquavent 5000 with mechanical seal)
- · Watertight throughout entire lifetime
- · Improved resistance to dry running and foreign bodies
- · No steam leakage


#### Aquavent 6000C / 6000SC

- · Brushless EC motor with higher durability
- 14% lighter construction than the predecessor pump results in less fuel/energy consumption of vehicle
- · Self-protection:
  - Reduced loading thanks to smooth start-up control
  - Overload protection by integrated blocking and dry running protection
- · No maintenance

#### Aquavent 6000SC

- Magnetic coupling (seal-free; basic Aquavent 6000C with mechanical seal)
- · Watertight throughout entire lifetime
- · Long lifetime (comparable with motor)
- · No steam leakage

#### Static head and pressure loss characteristics

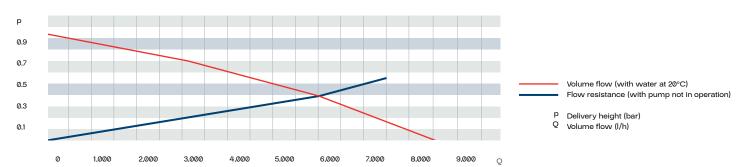

## **TECHNICAL DATA**

Circulation pump	Volume flow (I/h)	Nominal voltage (V)	Working voltage range (V)	Nominal power requirement (W)	Dimensions (L x W x H)	Weight kg
Aquavent 6000C (U4855)	6,000 (against 0,4 bar)	24	20-28	210	225 x 110 x 115	2.4
Aquavent 6000SC (U4856)	6,000 (against 0,4 bar)	24	20-28	210	229 x 110 x 115	2.5

- We

07/24 -